ATTIC LADDER WAREHOUSE

J SERIES DELUXE TIMBER ATTIC LADDER.

Premium grade timber 3-section folding ladder for use in conventional roofs

CUSTOMER PROFILE:

- For customers who will use the ladder frequently and who want a premium style ladder.
- Suits customers who want extreme stability, emphasise safety and easy access
- Suitable for people with less mobility and young ones

CUSTOMER BENEFITS:

- Wide, deep treads and gentle 57° ladder angle mean safe, easy climbing
- Choice of two opening sizes:
 - Wide 700mm opening gives easy everyday access
 - Super wide 900mm opening ultimate access for broad shouldered people and larger storage items
- Hand crafted in Australia from premium 25mm knot free pine giving great aesthetics and reliability
- Triple lacquer coated ladder sections give highest quality appearance and wear resistance
- Adjustable heavy duty double tension spring, heavy duty hinge and spring assisted ladder sections for finger tip operation
- Heavy duty 20mm ply veneered solid core hatch for sound and thermal insulation
- Strong, stable 410kg spread load capacity for long life with everyday use (ideal for passing boxes up in a chain)
- Full length handrail to right-hand side is standard for great climbing stability
- Metal in-ceiling hand rail and roof space skirt gives more security



1300 112 493 | Team@atticladderwarehouse.com.au 4/12 Anderson st Banksmeadow

J SERIES DELUXE TIMBER ATTIC LADDER.


ATTIC LADDER WAREHOUSE

TECHNICAL SPECIFICATIONS

MODEL	HATCH SIZES (A/B)	Floor-ceiling (E) (No of threads)	STANDOUT (C)	FOLDOUT (D)
J260	685x1185mm	2.6m (11)	1550mm	1700mm
J270	685x1185mm	2.7m (11)	1700mm	1850mm
J300	685x1285mm	3m (12)	1850mm	2000mm
J320	685x1430mm	3.2m (12)	1950mm	2100mm
J350	685x1485mm	3.5m (14)	2000mm	2200mm
J260 W	885x1185mm	2.6m (11)	1550mm	1700mm
J270W	885x1185mm	2.7m (11)	1700mm	1850mm
J300M	885x1285mm	3m (12)	1850mm	2000mm
J320W	885x1430mm	3.2m (12)	1950mm	2100mm
J350W	885x1485mm	3.5m (14)	2000mm	2100mm

DIMENSIONS

	TREAD	STILE	PACKED	CASING	
DEPTH	100mm	100mm	1200-1450mm	1195-1440mm	
THICKNESS	25mm	25mm	460mm	200x25mm	
WIDTH	386mm	700/900mm	700/900mm		
WEIGHT	46-51kg				
LOAD CAPCITY	410kg spread load				

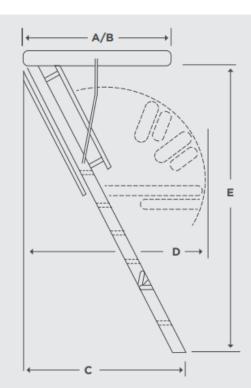



Require installation? No problem

Please contact our team so we can recommend your nearest installer.